

已确认此版本的所有图纸

签名:

日期:

REV.




DESCRIPTION

DATE

AUTHOR

A

2024/05/04

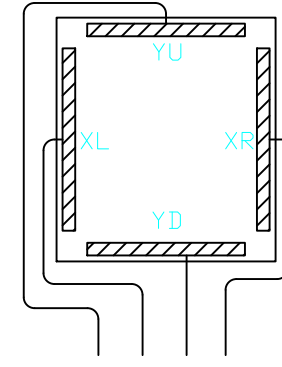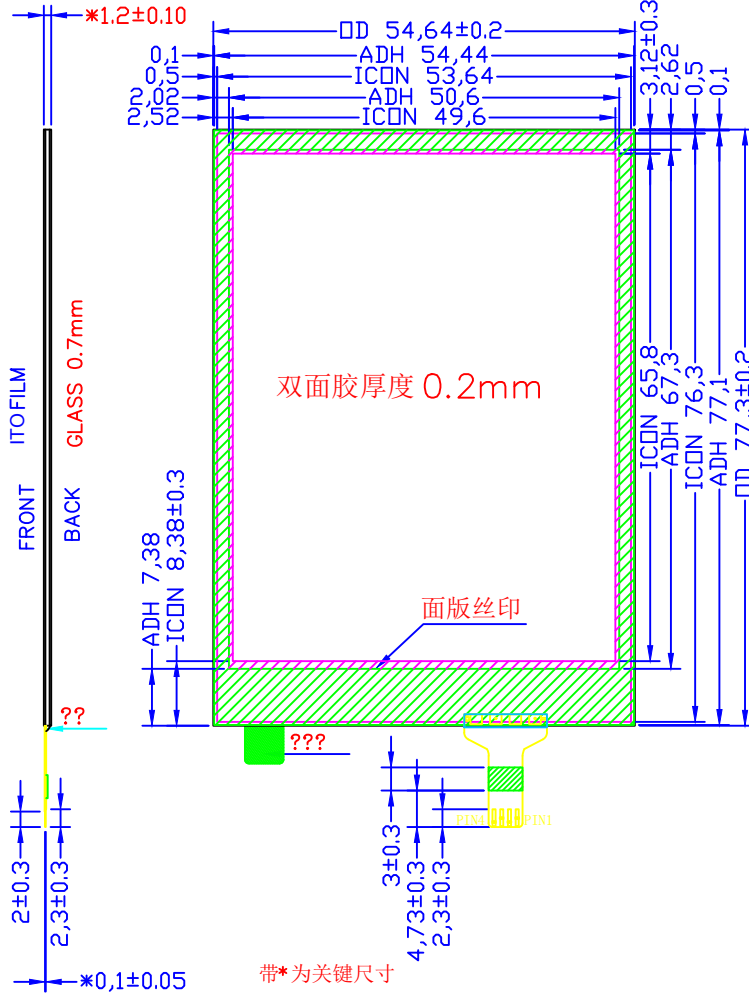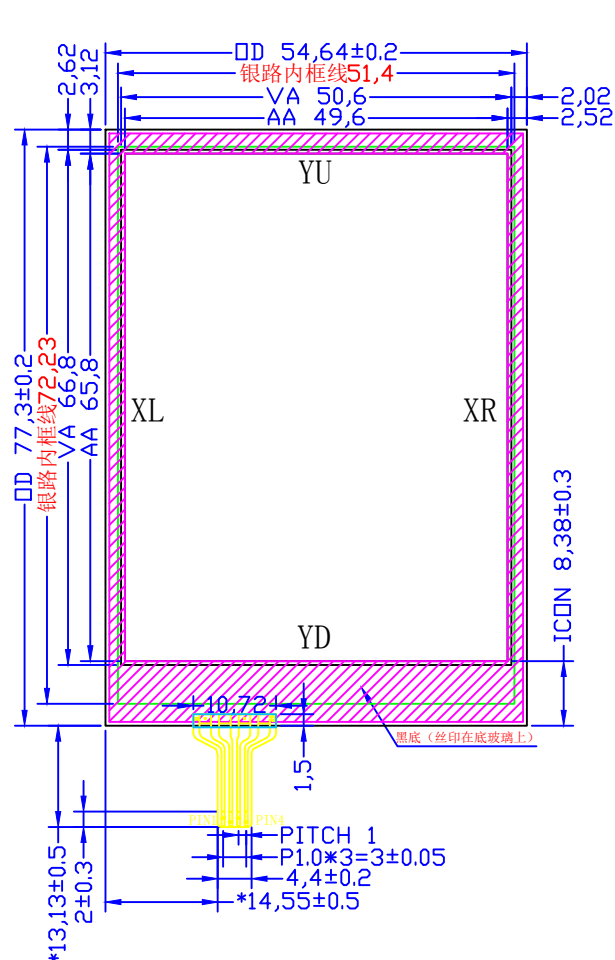

YU XL YD XR  
1 2 3 4

走线示意图


Pin NO.	Assignment
1	YU
2	XL
3	YD
4	XR

逻辑图

- 技术参数:
- ITO膜+ITO玻璃+FPC引线  
ITO膜: 单面涂  
ITO玻璃: 厚度0.7mm  
总厚度: 1.2±0.10
  - 电路等级: DC 3V 5~30mA
  - 绝缘阻抗: ≥20MΩ(25V DC)
  - 透光率: ≥80%
  - 操作压力: <100g
  - 端点阻抗: X: 100~640Ω Y: 300~1100Ω
  - 使用寿命: 打点≥1,000,000次, 笔划寿命: ≤30,000次  
150g力, 来回算两次
  - 响应时间: <15ms
  - 表面硬度: 3H
  - 工作环境: -10℃~+60℃, ≤90%RH
  - 储存环境: -20℃~+70℃, ≤90%RH
  - 未注尺寸公差按±0.20mm, 银路内框线的公差为+0/-0.4
  - 产品符合"ROHS"要求。

GENERAL TOL. 0.20		ALL UNITS: mm	
DATE	DWN:	DATE	CHK:
05/04			

MODEL NUMBER :  
HR4 8637 3.2



SHEET: 1 OF 1

DATE:  
2024/05/04

DO NOT SCALE THIS DRAWING.

PROJECTION